


RE:FELT

RADIAL

INSTALLATION GUIDE

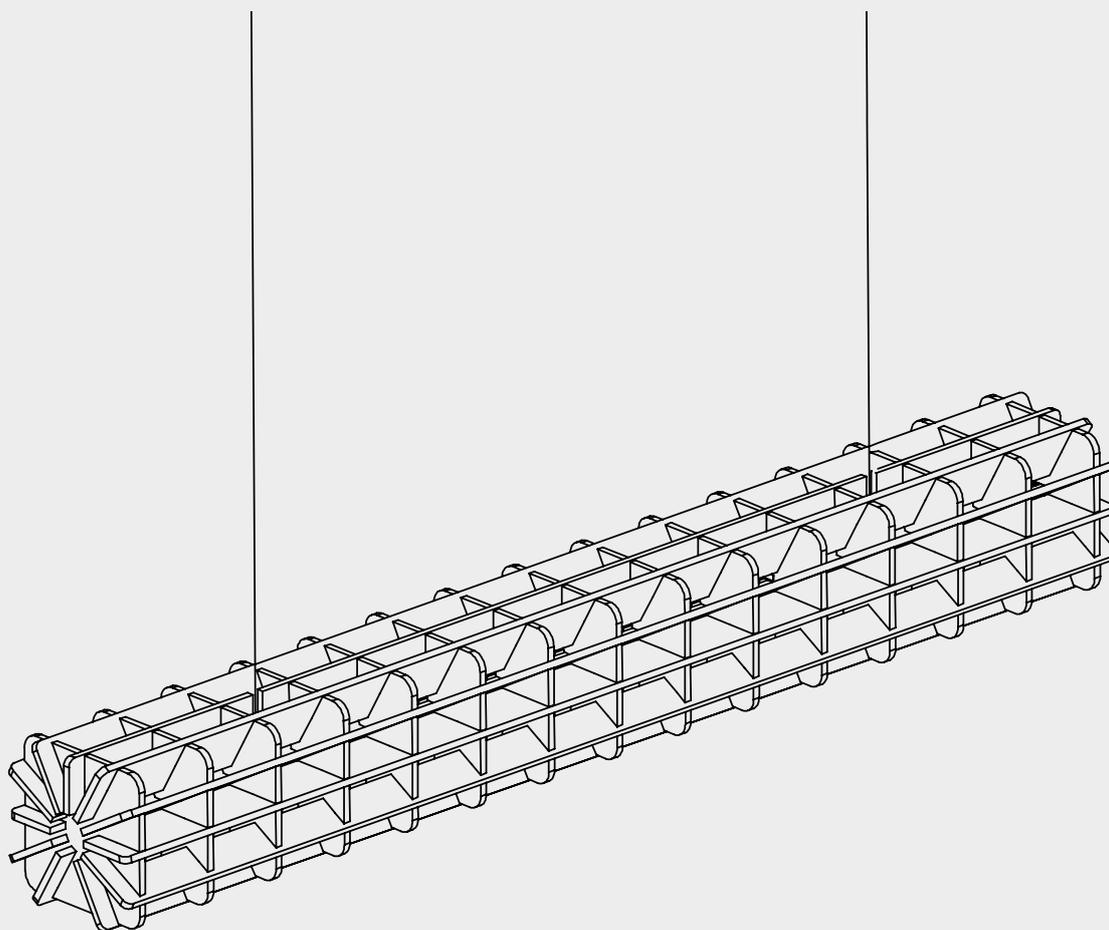

TECHNICAL DATA

EU

| | |
|------------|--|
| Voltage | 220-240V |
| Wattage | 1 x 20W |
| Frequency | 50/60 Hz |
| Light | This product is supplied with a Philips CorePro LEDtube 1500mm 20W840 (non-dimmable) |
| Lampholder | G13 |

USA

| | |
|------------|--|
| Voltage | 110-120V |
| Wattage | 1 x 24W |
| Frequency | 50/60 Hz |
| Light | 5ft LEDtube, single ended Type B, Ballast Bypass |
| Lampholder | G13 |

NOTE


Connect the LEDtube side, marked with logo, to the power source of the Radial (feed side).

INTRODUCTION

- Follow the instructions for a safe installation.
- Make sure that the power supply has been turned off before installing or cleaning the product.
- Pay attention to the correct colors when connecting the wires: blue (N), brown or black (L) and protection class I yellow-green (earth wire).
- Maintain interior lighting with a dry cloth or brush. Do not use alcohol or any other solvents to clean the product. Keep all electrical components dry. Make sure the power is switched off before cleaning this product.
- If the fixture is mounted on a metal surface, it must be earthed or connected to earthing from the electrical installation.



The lighting fixture has been designed, produced and tested according to European safety regulations (EN-60598 / CE). All used components are UL-registered. Changes in design and technical specifications reserved.

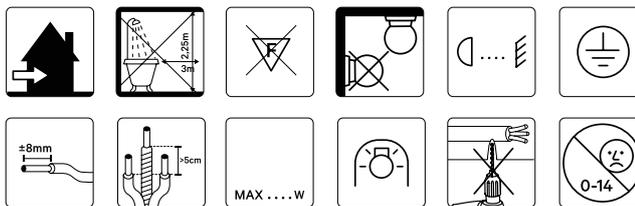

ABOUT


The design of the Radial lamp was inspired by 3D puzzles from our youth. All elements are cut from a PET felt panel and puzzled into this lamp. Using this technique PET Felt panels enable countless creations and applications. The Radial lamps are constructed with an ABS fluorescent holder and a Philips ProCore 1500 mm LED TL or 5ft LED-tube, single ended Type B, Ballast Bypass.

CARE AND MAINTENANCE


Make sure that the power has been turned off before cleaning this product. It is advised to clean by dabbing the PET Felt with a damp cloth. Do not rub! Rubbing can damage the material. If water is not sufficient, difficult stains can be removed with qualitative cleaning products like the James Cleaning set.

① Make sure the power is switched off


② Parts required

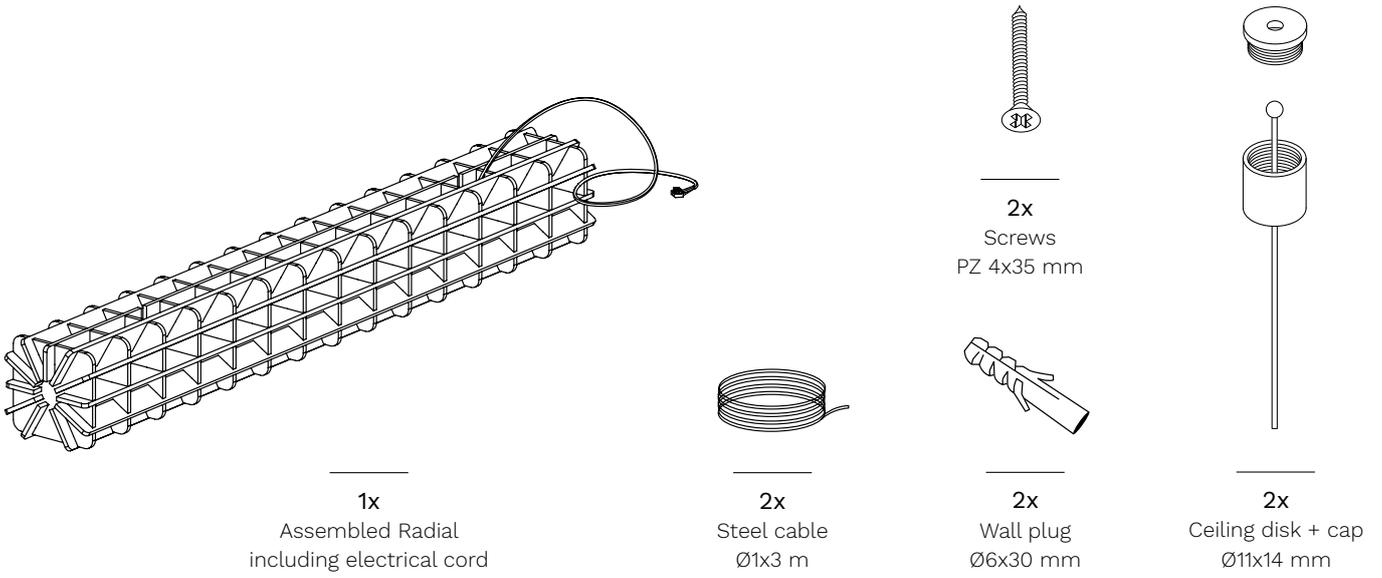


③ Tools required

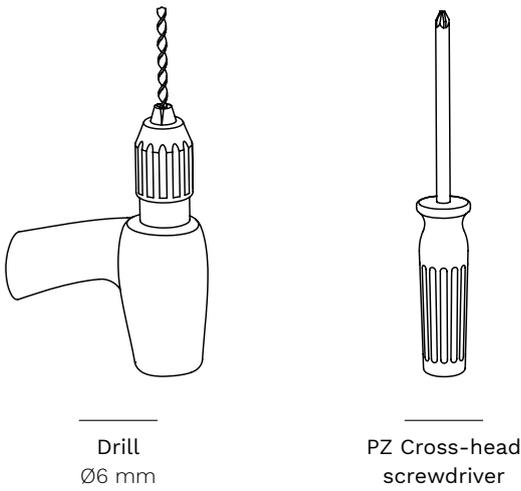


④ Drill holes with 990 mm between them

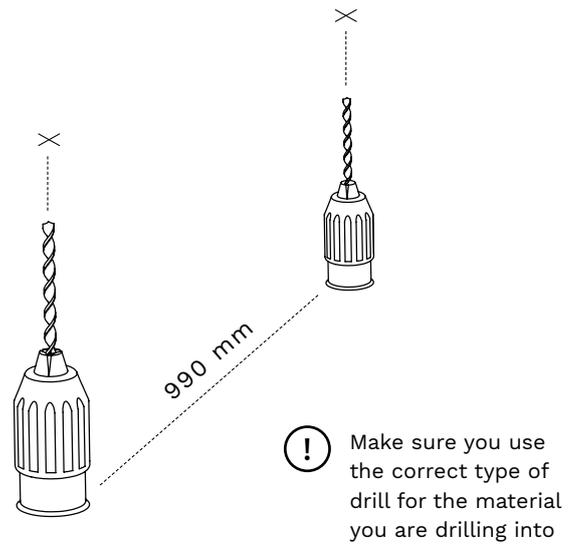


⑤ Insert wall plugs and screw the ceiling mount disk into the ceiling plug

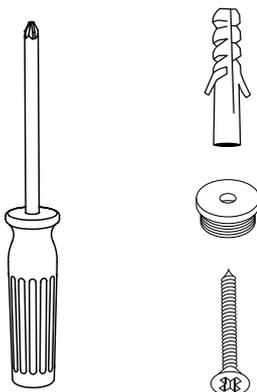

⑥ Insert the steel cable into the ceiling cap. Then mount the ceiling cap on the ceiling mount disk





-
- ⑦ Push the 2 steel cables into the cable adjusters on the lampshade and adjust them to the correct height.

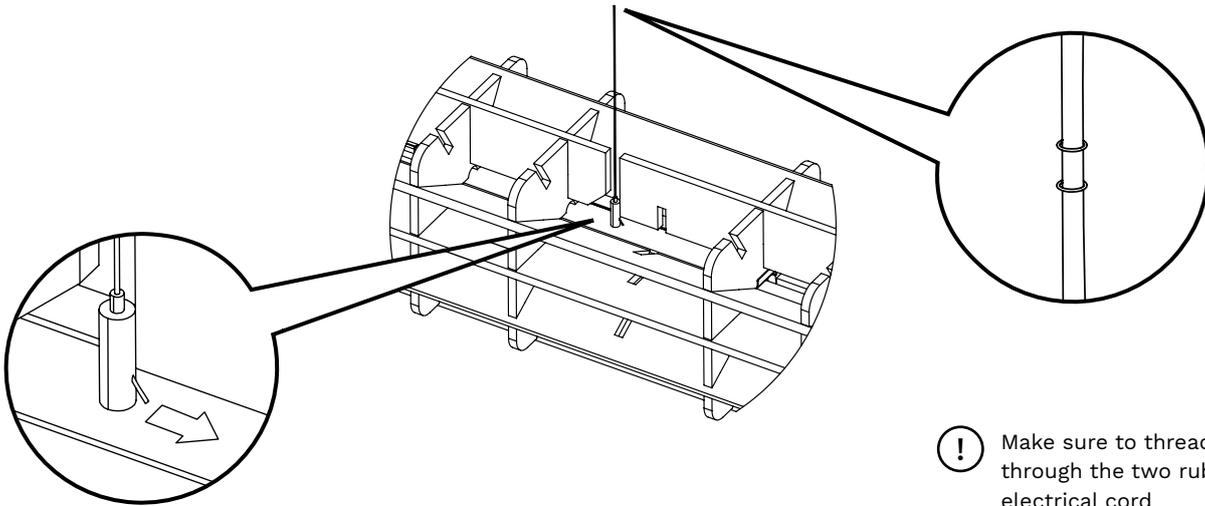

- ! Make sure to thread the steel cable through the two rubber rings on the electrical cord

-
- ⑧ Connect to power supply — and you are done!

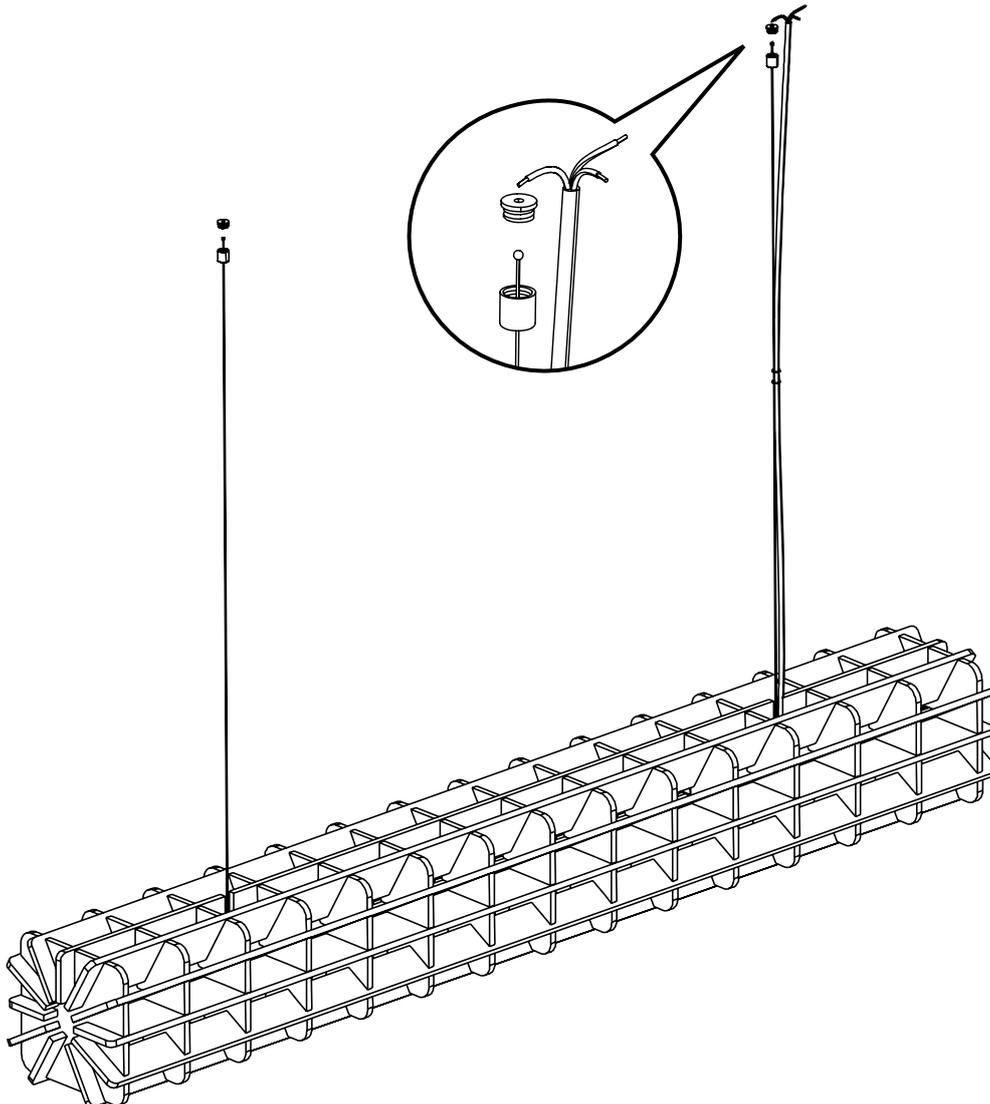

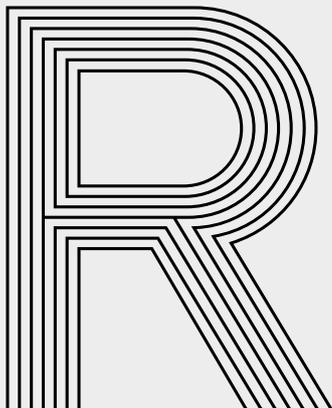

T +31 (0) 262 062 102
E info@refelt.nl
W refelt.nl

