

Ribbon

Acoustic wall panels



GLIMAKRA
OF SWEDEN



Ribbon



Acoustic wall panels




Acoustic wall panels with veneered slats on felt with polyester fibres from recycled PET bottles (RecoSilent). The panels give a wonderful wood feel while at the same time making it possible to regulate the reverberation time in the room with the help of different mounting methods. The assembly is easy with a screw or glue.

DIMENSIONS


2960 x 600 x 21mm (building dimensions)

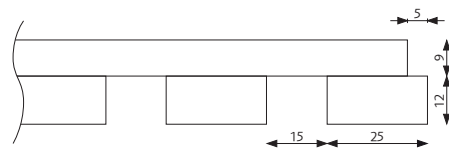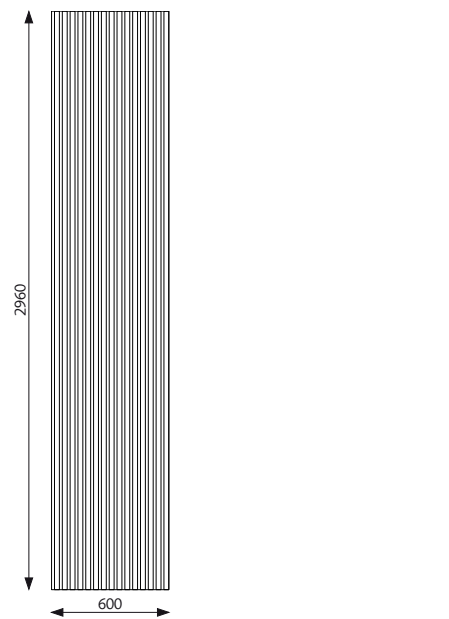

Standard panel

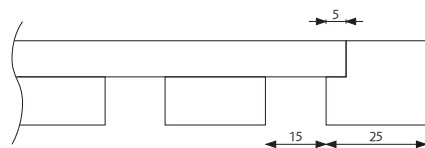

Cut felt with end slat

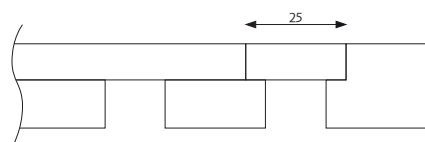

End slat with felt strip

Weight: 14,5kg

Volume: 0,05m³

STANDARD VARIANTS



Ash veneer on MDF
RecoSilent, black




Ash veneer on MDF
RecoSilent, grey



Oak veneer on MDF
RecoSilent, black



Oak veneer on MDF
RecoSilent, grey



Walnut veneer on black MDF
RecoSilent, black



1. End slat Walnut
2. End slat Oak
3. End slat Ash

Ribbon

Acoustic wall panels



GLIMAKRA
OF SWEDEN

DESCRIPTION

MDF slats 25x12mm with veneer nailed to 9mm felt, RecoSilent, at 15mm intervals. The slats are clear lacquered with gloss 10. The felt consists of polyester fiber from recycled PET bottles. The panels are designed to create a seamless transition between two panels. Mounting is done with screws or glue. To increase the sound absorption, the panels can be mounted on 45mm studs with or without insulation.

MATERIAL

Felt RecoSilent	9mm recycled PET. Black or grey.
	Fire classification: B-S1, d0
MDF	12mm standard or coloured throughout black MDF
Veneer	Ash, Oak, Walnut, lacquered with gloss 10

OPTIONS

Other variants on request.

The panels can be cut at extra cost.

Screws, black and grey 15 pcs/panel

Glue tube 0,5 pcs/panel

CERTIFICATES

Fire classification felt RecoSilent: B-S1, d0.




The product meets the requirements for environment and responsible supply chains defined by Möbelfakta.

SPECIFICATION TEXT

Glimakra Ribbon 4,2x2,96m consisting of: 7 pcs Ribbon Oak 2960x600mm, Oak veneer on MDF, RecoSilent black, end slat Oak. Mounted with screws.

CERTIFICATES

Acoustics: Measurements made in accordance with SS-EN ISO 354:2003 evaluation made according to standards for SS-EN ISO 11654:1997. Report No. 21-755-R1. Date: 2021-12-09. (Akustikverkstan, laboratory accredited by Swedac)

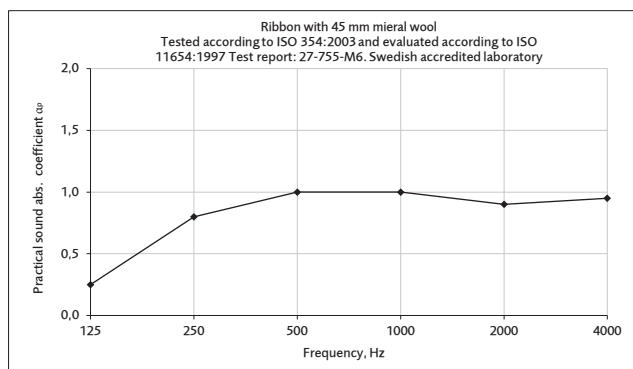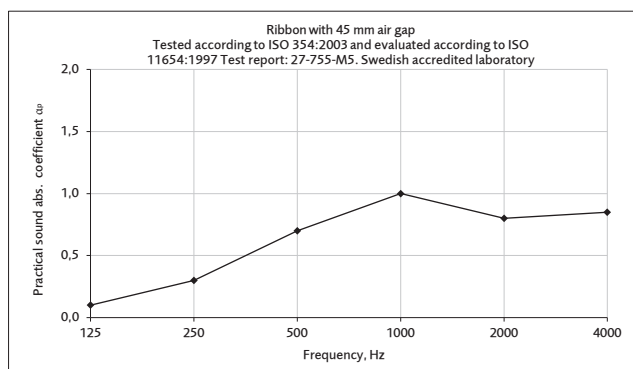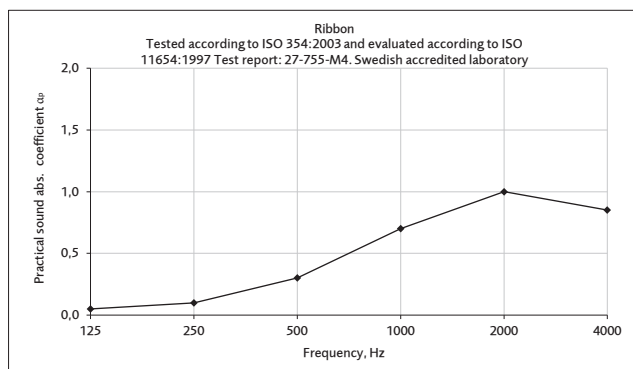

Ribbon

Acoustic wall panels



GLIMAKRA
OF SWEDEN

